

autop Scissor jack Micro 20/26



OPERATIVE RANGE:

Check-in, diagnostics and repair



PARTICULAR FEATURES:

Air- and hand-hydraulic scissor jack for platform lifts

APPLICATION:

The scissor jack program for usage on all platform lifts comprises air-hydraulic jacks. The scissor jack is used for wheel alignment and for brake repairs. The Micro 20/26 scissor jack has a capacity of 2 t or 2.6 t.



Particular features:

Optimal safety

- 2-hand-operation
- Mechanical parking system
- Return valve

Double telescopic arms

- Max. 1600 mm, respectively 1460 mm (Micro 26)
- galvanized arms
- Various sets of pads belong to the standard

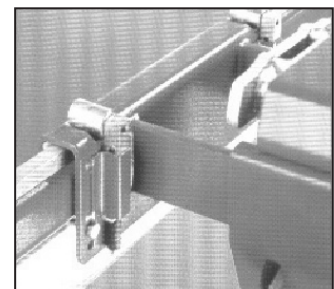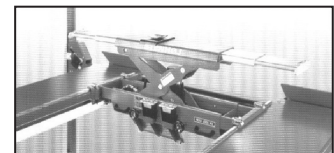



autop Scissor jack Micro 20/26

TECHNICAL DATA:	Micro 20	Micro 26
Capacity:	2000 kg	2600 kg
Lifting time (air with 1000/2000 kg	27/52 sec.	23/44 sec.
Min./Max.pressure	5.5 / 8.0 bar	5.5 / 8.0 bar

Pls. note:
air, dry, filtered, oiled on site necessary!

CORROSION-PROOF SURFACE TREATMENT

All autop jacks are led through a sling purifying plant (according to SA2.50 – ISO-Norm 8501-1:2007), dipped in primer, and finally led through an electro-static powder bake plant

STANDARD COLOUR:

RAL 3013 red
Special colours on request

OPTIONAL:


- Different pads
- Connection for compressed air
- Side support
- Maintenance unit, not provided on site

MOREOVER:

Our expert consultants would appreciate to help you with the planning of a new garage or the modernization of an existing one.

We offer to work out a workshop concept including an equipment proposal.


Please do not hesitate to contact us.

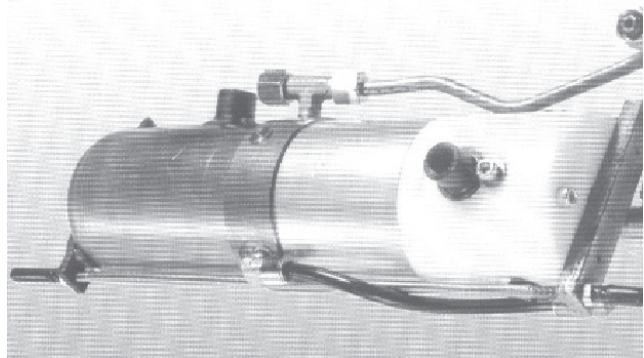


Double-acting, air-hydraulic pump with plastic housing and aluminium cylinder to avoid corrosion due to low-grade air quality.




Parking system

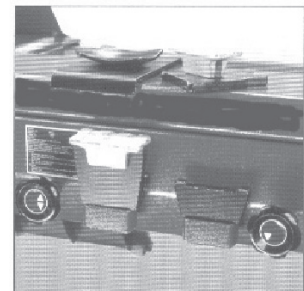

Standard Pads

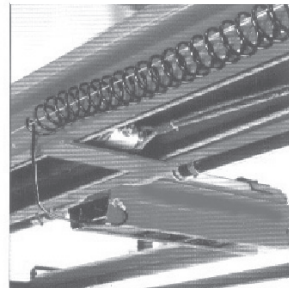

Connection for
ompressed air

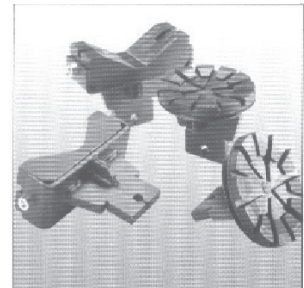

Optional extras:
additional pads

The data and pictures in this product information are not binding and are only giving an approximate description. Moreover we reserve the right of differences between the goods delivered and the data and pictures given here (i.e. technical data, equipment, material and optical appearance) so far as the differences are reasonable for the customer and a possible reduction in value or utility value of the goods delivered is not considerable

No liability accepted for specifications that are subject to alteration - validity 03/2011



autop Maschinenbau GmbH * Sandkampstraße 90 * D-48432 Rheine
Tel. +49 (0)5971/8602-02 * Fax +49 (0)5971/860225 * E-Mail: mail@autop.de * www.autop.de