


Amazing lifting technology!

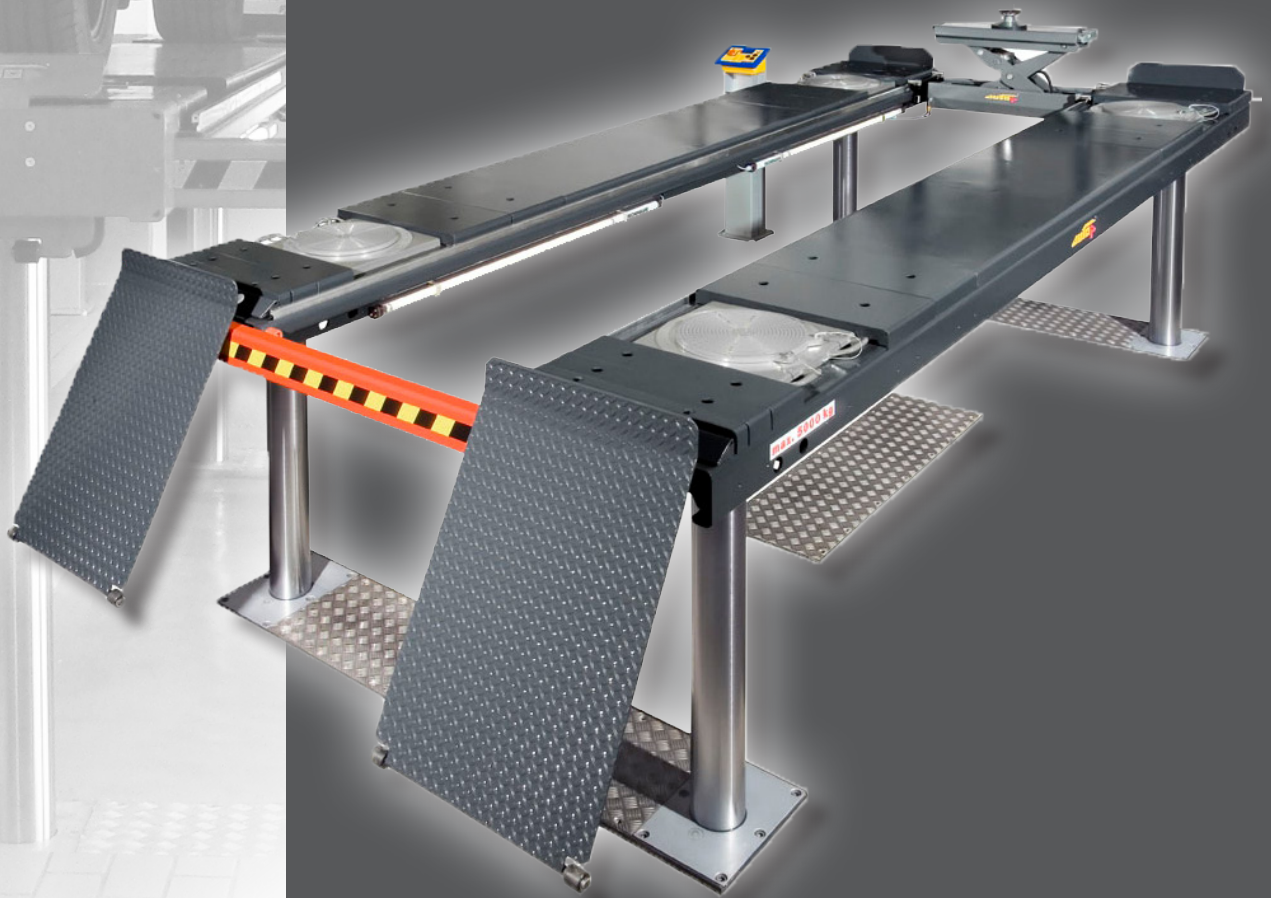

autop Quattrolift 4.50 F 480 / 550 Wheel alignment

The 4-ram lift autop Quattrolift is appropriate for repair and maintenance as well as for diagnostic.

A wide range of accessories:

- front and rear recesses for using either 4 turntables or front turntables and rear slip plates
 - spacers for the positioning of the turntables and/or slip plates
- make this platform lift perfectly suitable for wheel alignment. The lift responds to the requirements of the car manufacturers and can be equipped with any wheel alignment package.

For the wheel-free lifting you can use the optional „jacking beam“ even for very difficult vehicles. The optional illumination kit improves the working conditions.

autop Maschinenbau GmbH

Sandkampstr. 90

D-48432 Rheine

Tel. ++49(0)5971/8602-02

Fax ++49(0)5971/8602-25

E-Mail: mail@autop.de

www.autop.de


...a company of the STENHØJ-group!


Professional lifting technology!

Quattrolift 4.50 F 480/550

Components

- two separate hydraulic units with two inversed cylinders each
- hard-chromed cylinders
- corrosion-free guiding elements
- SPS - control unit with micro-controller, digital display and integrated, pneumatic emergency drain
- flexible synchronizing and safety device
- installation of the hydraulic units in two waterproof cassettes
- installation of the pump unit and oil distribution in a separate waterproof cassette
- use of „bio-oil“ non hazardous to water
- platforms are equipped with anti-sliding coating (standard)

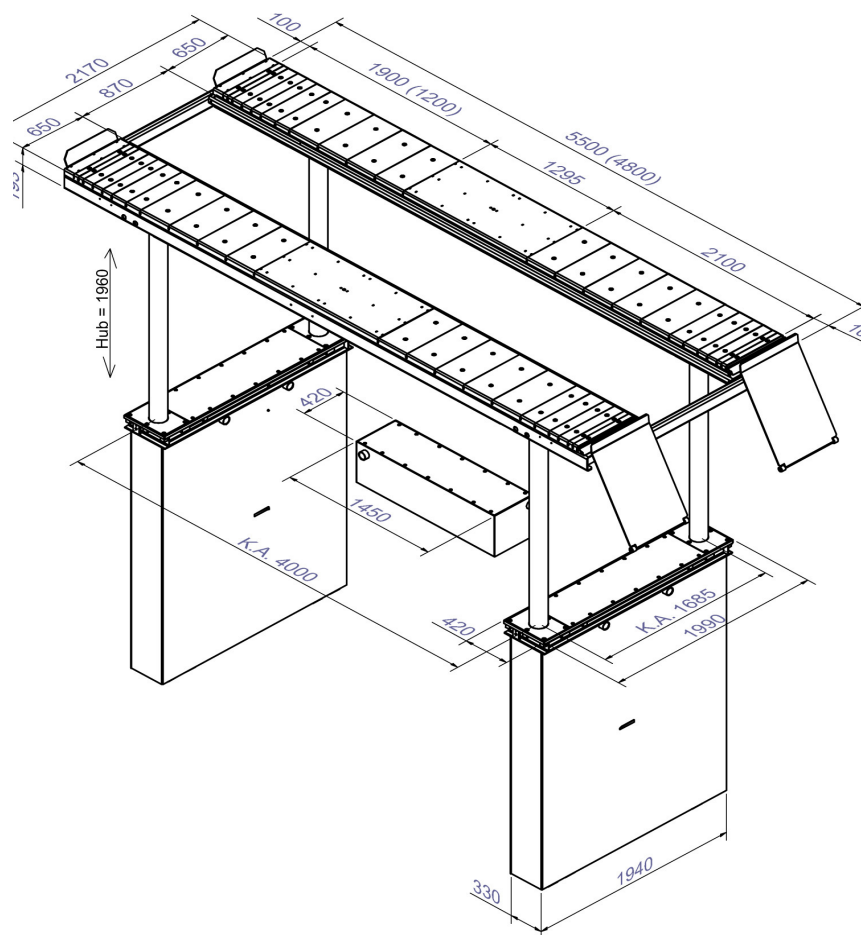

Technical data

Capacity:	5,000	kg
Piston distance:	1,685/4,000	mm
Cylinders' diameter:	4 x 140	mm
Lifting/lowering time:	appr. 45	sec
Stroke length:	1,960	mm
Lifting height:	2,155	mm
Foundation depth:	2,625	mm
Voltage:	230/400	V
	50	Hz
	16	A
Pump unit:	3.0	kW
Platform:		
Length (F480):	4,800	mm
Length (F550):	5,500	mm
Width:	650	mm
Wheel base max.:	4,850	mm
Drive-over height:	195	mm

Jacking Beam:

Capacity:	2,600	kg
Lifting height:	300	mm
Lifting time		
(air with 1000/2000kg):	27/52	sec
Min./max. pressure	5.5/8.0	bar

Service:

Our expert consultants would appreciate to help you with the planning of a new garage or the modernization of an existing one. We offer to work out a workshop concept incl. an equipment proposal.

Please do not hesitate to contact us!

Standard colour:

RAL 7016 (grey anthracite)

on request

RAL 5019 (blue)

autop Maschinenbau GmbH

Sandkampstr. 90

D-48432 Rheine

Tel. ++49(0)5971/8602-02

Fax ++49(0)5971/8602-25

E-Mail: mail@autop.de

www.autop.de

...a company of the STENHØJ-group!



No liability accepted for specifications that are subject to alteration - validity 07/2011. The date and pictures in this product information are not binding and are only giving an approximate description. Moreover we reserve the right of differences between the goods delivered and the date and pictures given here (i.e. technical data, equipment, material and optical appearance) so far as the differences are reasonable for the customer and a possible reduction in value of the goods delivered is not considerable.

autop[®]
Professional lifting technology